




JUST FAN is a ceiling fan with light with an industrial and modern style. This ceiling fan is ideal for the ventilation of areas ranging from 13m² to 17'6m² and has a low - consumption DC motor. It has 6 adjustable speeds with a 4 - 6 - 9 - 13 - 22 - 32W consumption and 51 - 77 - 103 - 129 - 155 - 185 revolutions per minute depending on speed. This chrome fan with transparent blades comes with a reverse function summer - winter, so you can also use it in winter, improving the efficiency of your heating system. Activated by remote control included. It also has SMART FAN technology, which will allow you to control it with the WiZ application. It works with WIFI 2.4 GHz and develops the same functionalities as the remote control. It is compatible with Alexa, Google assistant and Siri.

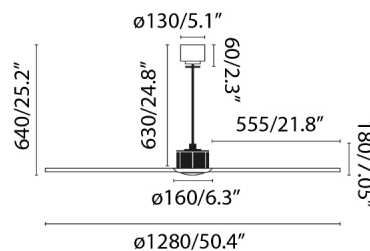

General characteristics

| | |
|---|------------------------------------|
| Fixation | Ceiling |
| Type | I |
| IP | 20 |
| voltage | 100V-240V |
| Hertz | 50/60Hz |
| Power | 16W |
| W | 4-6-9-13-22-32 |
| RPM | 51-77-103-129-155-185 |
| Airflow (m3/min) | 145.66 |
| Reverse function | Yes |
| Engine type | DC |
| No. of blades | 3 |
| Reversible blades | No |
| Pitched ceiling | No |
| Can be installed without seat post | No |
| Type of control included | Remote control + Alexa/Google/Siri |

Material

| | |
|-----------------------|-------|
| Body/Structure | Steel |
| Diffuser | Glass |

Lighting characteristics

| | |
|------------------------------|-------|
| Light source included | Yes |
| Temperature | 3000K |
| | |
| LM | 709lm |
| CRI | >80 |
| Energy classification | E |

Driver

Additional information

| | |
|-------------------------------|---------------|
| Additional rods length | 100-200-450mm |
|-------------------------------|---------------|

File download

| | |
|--------------------------|------------|
| General documents | Download > |
| Images | Download > |
| | Download > |
| 2D / 3D | Download > |
| | Download > |
| BIM | Download > |

Blade material PC

Finish

Body/Structure Shiny Chrome

Diffuser Opal